

SOCKET

Fittings with GAS threading Fittings



MODEL CODE: 0400230

TECHNICAL DATA SHEET

Connectivity standard:	Internal thread GAS cylindrical ISO 228/1.
Material:	Polypropylene (PP)
Color:	Black (RAL 9011)
Operating pressure:	10 bar at 20°C
Max working temperature:	80°C


Torques

Filettature - Threads - Filetts	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Serraggio Max materiale PP - Max Tightening PP material - Serrage Max Matériel PP	2 Nm	3 Nm	6 Nm	8 Nm	10 Nm	15 Nm	20 Nm	25 Nm
Serraggio Max materiale PA - Max Tightening PA material - Serrage Max Matériel PA	3 Nm	5 Nm	8 Nm	10 Nm	12 Nm	17 Nm	30 Nm	35 Nm

The maximum tightening torques specified for fittings Bucchi depend on the compliance of the threads that reference to international specifications on the threads.

SOCKET with female threaded end G

4000 - Outdoor & Gardening

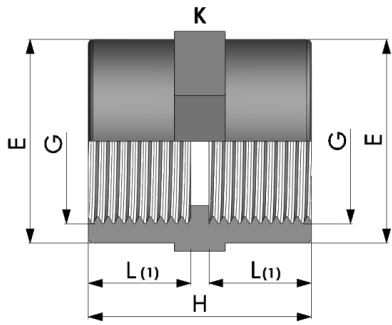

Dimensions

Code	G	L(1)	H	E	K
0400230.050303	1/2"	16	35,5	30	30
0400230.050505	3/4"	19	42	35,5	36
0400230.050707	1"	22	46,5	43	43
0400230.050909	1"1/4	24	53	57,5	58
0400230.051111	1"1/2	26,5	58,5	65	70
0400230.051515	2"	30	67	80,5	83