

STEPPED STRAIGHT HOSE NOZZLE

Stepped hose nozzles with GAS thread

Fittings



MODEL CODE: 0400754

TECHNICAL DATA SHEET

Connectivity standard:

Bucchi srl for pipe fittings adopts as standard connection ISO 228/1; in order to improve hydraulic seal has decided to create its own internal regulations, based on a soft conical thread. Therefore it is noted that to ensure the hydraulic seal declared
 External thread GAS cylindrical ISO 228/1
 Hose connector DN

Material:

Polypropylene (PP)

Color:

Black (RAL 9011)

Operating pressure:

6 bar at 20°C

Max working temperature:

80°C


Torques

Filettature - Threads - Filetts	1/4"	3/8"	1/2"	3/4"	1"	1"1/4"	1"1/2"	2"
Serraggio Max materiale PP - Max Tightening PP material - Serrage Max Matériel PP	2 Nm	3 Nm	6 Nm	8 Nm	10 Nm	15 Nm	20 Nm	25 Nm
Serraggio Max materiale PA - Max Tightening PA material - Serrage Max Matériel PA	3 Nm	5 Nm	8 Nm	10 Nm	12 Nm	17 Nm	30 Nm	35 Nm

The maximum tightening torques specified for fittings Bucchi depend on the compliance of the threads that reference to international specifications on the threads.

STEPPED STRAIGHT HOSE NOZZLE for DN-DN(1)-DN(2) hoses
 - with male threaded end G1 with place to fit O-ring with male threaded G1 end G1

4000 - Outdoor & Gardening

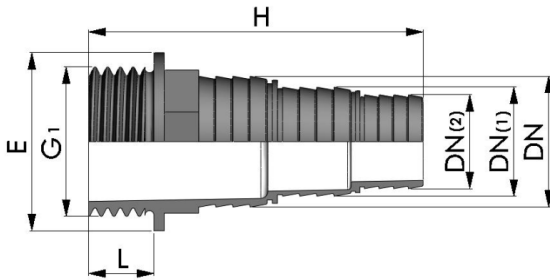

Dimensions

Code	G1	DN mm(inch)	DN (1) mm(inch)	DN (2) mm(inch)	E	H	L
0400754.052HDB00	1/2"	19 (3/4")	13 (1/2")	10 (3/8")	27	97	14,5
0400754.053KHD00	3/4"	25 (1")	19 (3/4")	13 (1/2")	32,5	98,5	16
0400754.053KID00	3/4"	25 (1")	20 (25/32")	13 (1/2")	32,5	98,5	16
0400754.053QNK00	3/4"	40 (1"9/16)	32 (1"1/4)	25 (1")	32,5	98,5	16
0400754.054NKH00	1"	32 (1"1/4)	25 (1")	19 (3/4")	40	101	18,5
0400754.055OMK00	1"1/4	43,5 (1"3/8)	30 (1"3/16)	25 (1")	46	103,5	21
0400754.055PNK00	1"1/4	43,8 (1"1/2)	32 (1"1/4)	25 (1")	49,5	103,5	21
0400754.056PNK00	1"1/2	42,38 (1"1/2)	32 (1"1/4)	25 (1")	54	103,5	21