


SUCTION SIDE MANIFOLDS FOR 2 PUMPS - ZINC PLATED STEEL PN16

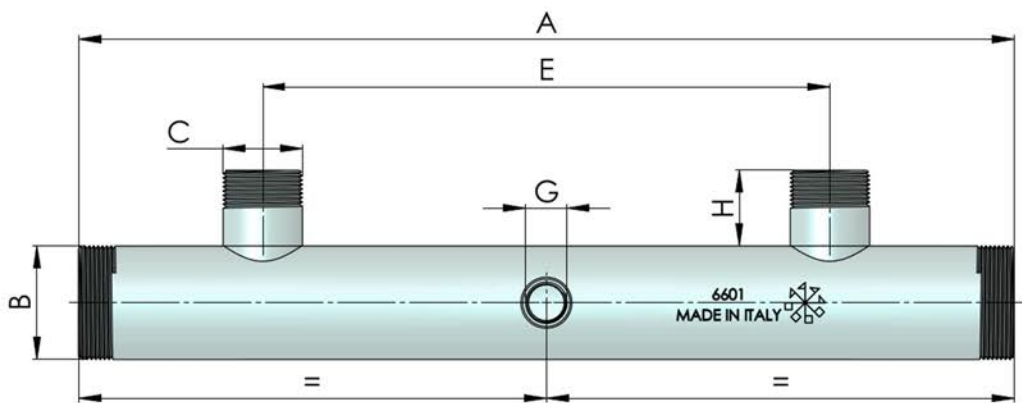


code	A (mm)	B ($\varnothing$)	C (G)	E (mm)	G (G)	H (mm)	Weight (kg)
6600	500	1"1/2	1"	300	1/2"	40	1.80
6603	500	2"	1"	300	1/2"	40	2.10
6601	500	2"	1"1/4	300	1/2"	40	2.20
6605	500	2"	1"1/2	300	1/2"	40	2.30
6609	500	2"1/2	1"1/4	300	1/2"	40	2.80
6602	500	2"1/2	1"1/2	300	1/2"	40	2.80
6604	500	3"	2"	300	1/2"	40	3.40

6606	700	2"	1"1/4	360	1/2"	40	3.05
6611	700	2"	1"1/2	360	1/2"	40	3.10
6613	700	2"1/2	1"1/4	360	1/2"	40	3.90
6612	700	2"1/2	1"1/2	360	1/2"	40	3.90
6610	700	3"	2"	360	1/2"	60	5.00
6630	700	DN80	2"	360	1/2"	60	15.00
6614	700	DN100	3"	360	1/2"	60	15.10

A	Length of manifold in mm
B	Dimension of main pipe, male threaded both sides.
C	Pumps' connection, male threaded.
E	Distance between pumps.
G	Female sleeves for instruments.

MATERIAL	Tube FE P11 DIN2394 EN10204 2.2 (weld, polish)
TUBE THICKNESS	3mm
THREADS	UNI EN ISO 228-1 cylindrcal (DIN2999, BSPP)
SURFACE TREATMENT	Zinc plated UNI EN ISO 2081 Fe/Zn8/A

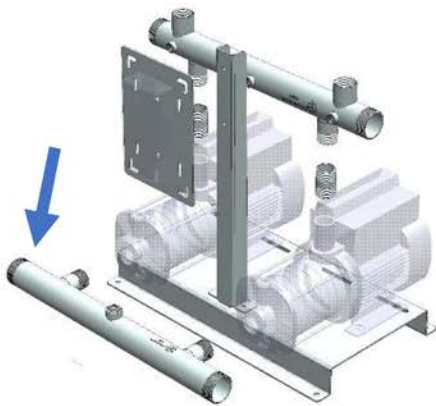

The information in this catalog may be modify by the company, request confirmation at the time of the order.
On request may be provided certificates of raw material, welding and test certification, ISO certification.