

90° ELBOW with female threaded ends G

Fittings with GAS threading

Fittings



MODEL CODE: 0401250


TECHNICAL DATA SHEET

Connectivity standard:	Internal thread GAS cylindrical ISO 228/1.
Material:	Polypropylene (PP)
Color:	Black (RAL 9011)
Operating pressure:	10 bar at 20°C
Max working temperature:	80°C

Torques

Filettature - Threads - Filetts	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"
Serraggio Max materiale PP - Max Tightening PP material - Serrage Max Matériel PP	2 Nm	3 Nm	6 Nm	8 Nm	10 Nm	15 Nm	20 Nm	25 Nm
Serraggio Max materiale PA - Max Tightening PA material - Serrage Max Matériel PA	3 Nm	5 Nm	8 Nm	10 Nm	12 Nm	17 Nm	30 Nm	35 Nm

The maximum tightening torques specified for fittings Bucchi depend on the compliance of the threads that reference to international specifications on the threads.

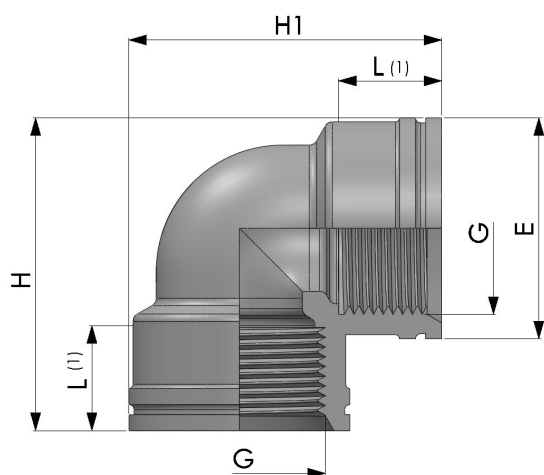

90° ELBOW with female threaded ends G

4000 - Outdoor & Gardening

Dimensions

Code	G	L(1)	H	H1	E
0401250.050909	1"1/4	24,5	75	75	53,5
0401250.051111	1"1/2	24,5	81	81	61
0401250.051515	2"	28	98	98	75